

Titebond
THE PRO'S ADVANTAGE



Titebond
THE PRO'S ADVANTAGE

CAULKS & SEALANTS

Established as an innovative leader within the woodworking and construction markets, Titebond offers a comprehensive line of caulks and sealants that exceed industry performance specifications.



Visit Titebond.com for the most up-to-date product information.



Franklin International Columbus, Ohio 43207 614.443.0241 Technical Service 1.800.347.4583 © 2021 01079_3774GP FF937

Titebond®

THE PRO'S ADVANTAGE

With a long-term commitment to the future growth of our customers, partners and worldwide markets, Franklin International is positioned to provide many application solutions. Through more than 80 years of innovative research and development, Franklin formulated the Titebond brand of products. Professionals demand performance and Titebond delivers the quality and consistency that ensures unbeatable adhesion in a wide variety of applications and weather conditions.



2

INNOVATION

Caulks & Sealants

Innovation


The **FIRST** comprehensive line of colored caulks.

The **FIRST** water-based, elastomeric sealant with 100% joint movement.

The **FIRST** full color palette offering of advanced polymer technology sealants for vinyl siding, fiber cement siding, metal roofing and overall building material industries.

4	High Performance Sealants	WeatherMaster DuraMaster	Metal Roof Concrete Joint	Ultimate MP Gutter & Seam
14	Exterior Sealants	Roof Plus Blacktop Repair	Roof Cement	Concrete Repair
16	Interior Sealants	Kitchen & Bath	Radon	Acoustical
18	Multi-Purpose Caulks & Sealants	100% Silicone Painters	UA 920 Pro-Grade Plus	Painters Plus Pro-Grade
22	Foam Sealants	Foam Sealant Family		

24	Merchandising
28	Specifications
30	SKU Information

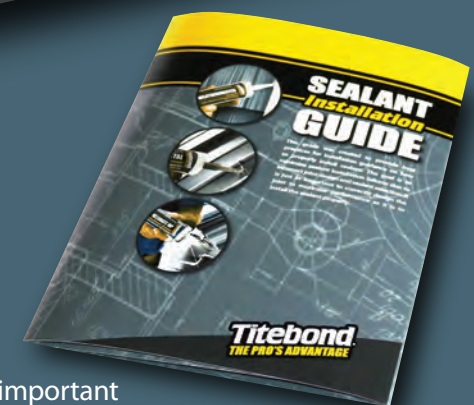

With our quality sealants, it is important to follow **installation guidelines** to ensure the sealant performs as expected. Deviating from these guidelines will void the limited warranty we provide.

Please visit titebond.com/sig to review these guidelines before you begin your project.

3

WEATHERMASTER™ Sealant

Titebond® WeatherMaster™ Sealant is a premium-grade, superior polymer formula that offers unbeatable adhesion to wood, vinyl siding, masonry, PVC, fiber-cement siding/trim and most common building materials. It can be extruded in low temperatures, remains permanently flexible with zero shrinkage, adheres well to damp surfaces and provides a weatherproof seal against the elements.

Ideal For

Sealing windows, doors, shutters, exterior trim, siding, gutters and vents.

Seals

Siding, windows, doors, PVC, glass, fiberglass, masonry, wood and most common building materials.

Ordering Information

9.5 oz. Cartridge with removable nozzle
 White
 Clear
 Translucent

ITEM #	UNITS/CASE	CASES/PALLET
44001	12	108
43991	12	108
44011	12	108

200+ Colors Available

Performance

- APPLY DOWN TO 0°F
- UV RESISTANT
- PERMANENTLY FLEXIBLE
- CRACK PROOF
- ALCOHOL CLEANUP
- ALL WEATHER
- ADHERES TO WET SURFACES
- PAINTABLE*
- MILDEW/MOLD RESISTANT



Joint Movement

This sealant formula is capable of ±50% joint movement

Applications

Application Temperature
 Above 0°F (-18°C)

Tooling Time
 For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting
 Sealant is intended for exterior use. If used indoors, sealant may need to be painted. Painting may occur one hour after application with a water-based (latex-based) paint*. For other paint types, a compatibility test is recommended.

* Titebond WeatherMaster Translucent (44011) is a neutral cure silicone and NOT paintable.


Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G
 Federal Specification TT-S-00230C Type II Class A (White, Colors and Crystal Clear)
 CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N (White, Colors and Crystal Clear)
 USDA Compliant
 AAMA 802.3-16 Type II (White and Colors)
 LEED v4.1 (White and Colors)

Color Matching Program

Titebond is one of the only sealant manufacturers to offer a unique color matching program. Our 200+ colors are specifically matched to today's most popular siding, window and door colors. If you cannot find the perfect match for your application, please contact us at 1.800.347.4583 and we will provide you with an exact match.

METAL ROOF *Sealant*

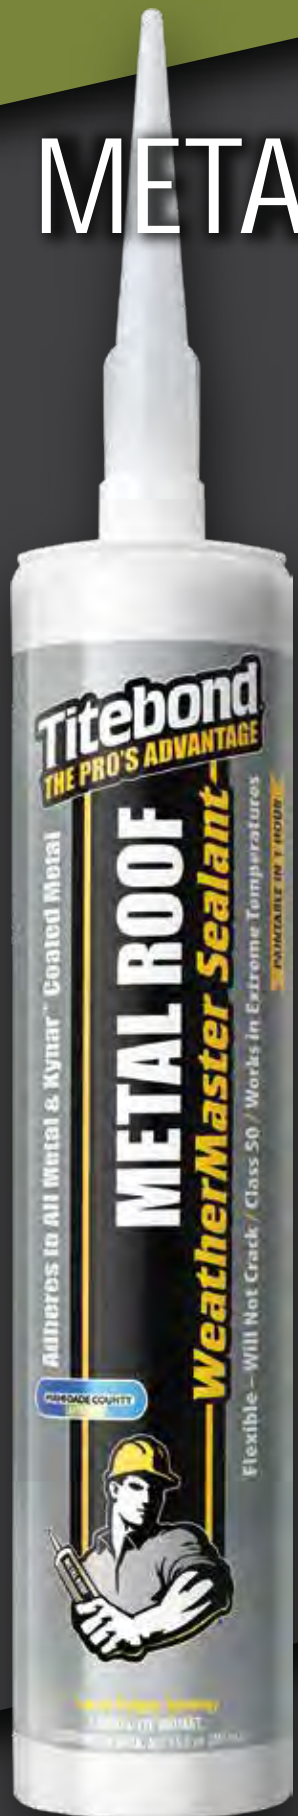

Titebond® WeatherMaster™ Metal Roof Sealant offers unbeatable adhesion to all metals including Kynar™ coated metals and most common building materials. It can be extruded in extreme temperatures and adheres well to wet and damp surfaces.

Ideal For

Sealing metal roofs, windows, doors, siding, gutters and vents.

Seals

Kynar™ coated metals, aluminum, galvanized steel, copper, PVC, wood, concrete, masonry, stucco, wall panels, vinyl, glass, plastic, siding, flashing, sheet metal and most common building materials. It is an exact color match to PRO-SNAP® and PRO-RIB® panels.

Ordering Information

9.5 oz. Cartridge / White with removable nozzle

100+ Colors Available



20 oz. Sausage Packs / White

11 Colors Available

Performance

 ADHERES TO COATED METALS	 CRACK PROOF	 PERMANENTLY FLEXIBLE	 ALCOHOL CLEANUP	 ADHERES TO WET SURFACES	 ALL WEATHER
 APPLY DOWN TO 0°F	 PAINTABLE*	 MILDEW/MOLD RESISTANT	 UV RESISTANT		



Joint Movement

This sealant formula is capable of ±50% joint movement

Applications

Application Temperature

Above 0°F (-18°C)

Tooling Time

For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting

Sealant is intended for exterior use. If used indoors, sealant may need to be painted. Painting may occur one hour after application with a water-based (latex-based) paint*. For other paint types, a compatibility test is recommended.

*Titebond WeatherMaster Metal Roof Translucent (61111) is a neutral cure silicone and NOT paintable.

Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G

Federal Specification TT-S-00230C Type II Class A (White, Colors and Crystal Clear)

CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N (White, Colors and Crystal Clear)

USDA Compliant

Color Matching Program


Titebond is one of the only sealant manufacturers to offer a unique color matching program. Our 100+ colors are specifically matched to today's most popular metal colors, including PRO-SNAP® and PRO-RIB® panels. If you cannot find the perfect match for your application, please contact us at 1.800.347.4583 and we will provide you with an exact match.



Approved for use on buildings in both Miami-Dade County and throughout the country. Product passed stringent third-party testing to meet requirements of use in high-wind areas.



ULTIMATE MP *Sealant*

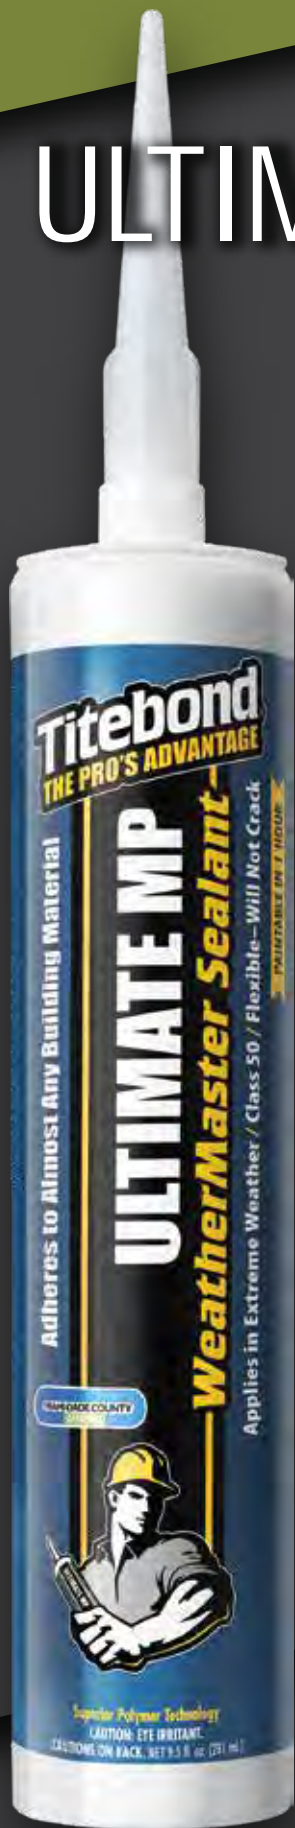

Titebond® WeatherMaster™ Ultimate MP Sealant is a premium-grade, multi-purpose exterior sealant that offers unbeatable adhesion to most common building materials. It is specifically formulated to outperform all other sealant technologies, including solvents, silicones, tripolymers and urethanes.

Ideal For

Exterior applications: windows, doors, shutters, exterior trim, metal/vinyl siding, gutters, vents, RVs, metal roofs, tractor trailers and buses.

Seals

PVC, wood, concrete, masonry, stucco, wall panels, vinyl, glass, fiberglass, plastic, siding, flashing, sheet metal, Kynar™ coated metals, aluminum, galvanized steel, copper and most common building materials.

Ordering Information

9.5 oz. Cartridge / White with removable nozzle

ITEM #	UNITS/CASE	CASES/PALLET
71001	12	108

15+ Colors Available













20 oz. Sausage Packs / White

ITEM #	UNITS/CASE	CASES/PALLET
71002	20	42

11 Colors Available

Performance

 ADHERES TO COATED METALS	 CRACK PROOF	 PERMANENTLY FLEXIBLE	 ALCOHOL CLEANUP	 ADHERES TO WET SURFACES	 ALL WEATHER
 APPLY DOWN TO 0°F	 PAINTABLE*	 MILDEW/MOLD RESISTANT	 UV RESISTANT		



ULTIMATE PERFORMANCE

Joint Movement

This sealant formula is capable of ±50% joint movement

Applications

Application Temperature
Above 0°F (-18°C)

Tooling Time
For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting
Sealant is intended for exterior use. If used indoors, sealant may need to be painted. Painting may occur one hour after application with a water-based (latex-based) paint*. For other paint types, a compatibility test is recommended.
*Titebond WeatherMaster Ultimate MP Translucent (71111) is a neutral cure silicone and NOT paintable.

Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G
Federal Specification TT-S-00230C Type II Class A (White, Colors and Crystal Clear)
CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N (White, Colors and Crystal Clear)
USDA Compliant



Approved for use on buildings in both Miami-Dade County and throughout the country. Product passed stringent third-party testing to meet requirements of use in high-wind areas.





DURAMA MASTER™

HIGH PERFORMANCE SEALANT

Titebond® DuraMaster™ Sealant is the first water-based elastomeric sealant with 100% joint movement capability. This revolutionary sealant offers fantastic adhesion to most common building materials, is 4X more durable than competitive water-based products and can span gaps up to 2" wide.

Ideal For

Interior & exterior use on windows, doors, trim, siding and more.

Seals

All types of siding, vinyl, metal, glass, wood, PVC, concrete, aluminum and most common building materials.

Ordering Information

10.1 oz. Cartridge with removable nozzle
White
Clear

ITEM #	UNITS/CASE	CASES/PALLET
32001	12	108
32131	12	108

13 Colors Available

Performance



100% Joint Movement

The First Water-based, Elastomeric Sealant with

Joint Movement

This sealant formula allows for 100% Expansion, 50% Contraction

Applications

Application Temperature

40°F – 120°F (4.4°C – 49°C)

Tooling Time


For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting

Painting may occur 2-4 hours after application with a water-based (latex-based) paint. For other paint types, a compatibility test is recommended.

Specifications

ASTM C920 Class 100/50 (White and colors)
ASTM C920 Class 25/25 (Clear)
ASTM C834 Type OP Grade -18°C
Federal Specification TT-S-00230C
AAMA 803.3
LEED v4.1
AAMA 808.3

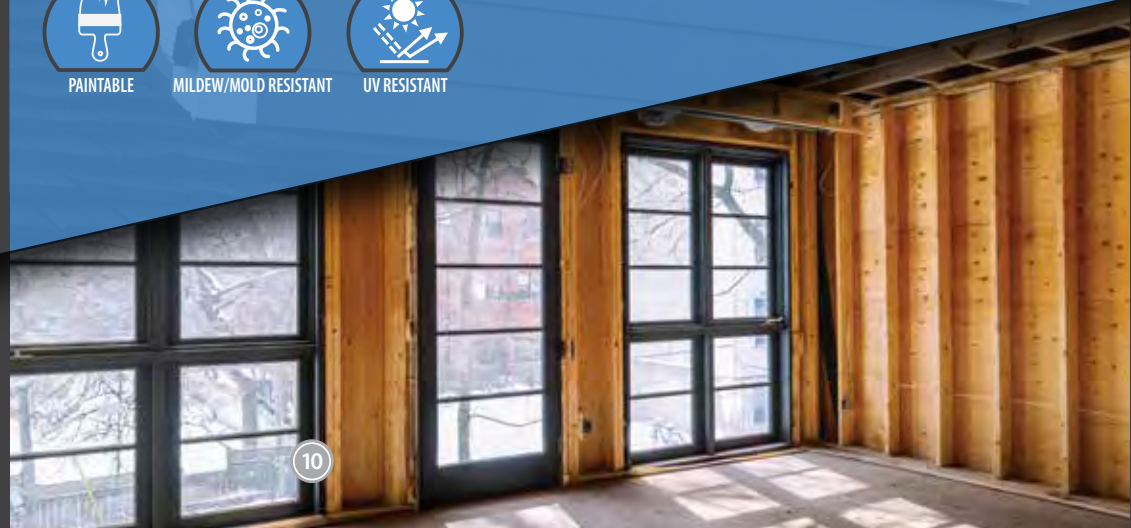

CONCRETE JOINT *Sealant*

Titebond® WeatherMaster™ Concrete Joint Sealant is a one-component, self-leveling, advanced polymer sealant that is designed to flow easily and smoothly into concrete cracks and joints, providing a permanent, durable seal.

Ideal For

Expansion joints, repairing cracks in concrete decks and floors, patios, sidewalks, driveways, basements and garages.

Seals

Concrete, galvanized steel, aluminum, wood and most common building materials.

Ordering Information

	ITEM #	UNITS/CASE	CASES/PALLET
10.1 oz. Cartridge Gray with removable nozzle	3191	12	108
28 oz. Cartridge Gray	3192	12	44

Joint Movement

This sealant formula is capable of ±25% joint movement

Applications

Application Temperature
Above 40°F (4.4°C)
Tooling Time
For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Specifications

ASTM C920 Type S Grade P Class 25 Use M (when primed) and T
Federal Specification TT-S-00230C Type I Class A
CAN/CGSB-19 13-M87 Classification C-1-40-B-N and C-1-25-B-N

Performance



GUTTER & SEAM *Sealant*

Titebond® WeatherMaster™ Gutter & Seam Sealant is a long-lasting, superior polymer sealant that maintains resiliency and flexibility. It provides a highly weather-resistant seal against water, wind, dust and dirt.

Ideal For

Sealing aluminum, galvanized and vinyl clad gutters and downspouts.

Seals

Aluminum, galvanized steel, PVC, metal, copper, masonry, wood and most common building materials.

Ordering Information

	ITEM #	UNITS/CASE	CASES/PALLET
9.5 oz. Cartridge with removable nozzle White	7321	12	108
Aluminum Gray	7331	12	108

Joint Movement

This sealant formula is capable of ±50% joint movement

Applications

Application Temperature
Above 0°F (-18°C)
Tooling Time
For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G
Federal Specification TT-S-00230C Type II Class A
CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N
USDA Compliant

Performance



ROOF PLUS & ROOF CEMENT Sealants



Titebond® Roof Plus Sealant is a water-resistant, solvent-based, elastomeric rubber sealant designed for roofing applications such as asphalt shingles, metal trim, solar roof systems, architectural metals, painted metals, aluminum and general roofing applications. It is resistant to dust, dirt and stains and is paintable. Sealant can be applied to itself (resealable).

Ideal For

Sealing metal trim, solar roof systems, architectural metals and general roofing applications.

Seals

Metal, aluminum, asphalt shingles, masonry, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Clear

ITEM #	UNITS/CASE	CASES/PALLET
3241	12	108

Specifications

ASTM C920 Type S Grade NS Class 12.5 Use T, NT, M, A and O
Federal Specification TT-S-00230C Type II Class B

Performance



Titebond® Roof Cement Sealant is an all-weather, asphalt based patching compound specifically designed and formulated to repair cracks, seams, gaps and holes in roofing materials. It is ideal for repair and new construction roofing applications.

Ideal For

Sealing around skylights, vents, chimneys, valleys and exhaust pipes.

Seals

Metal, aluminum, asphalt, shingles, masonry, wood and most common building materials.

Ordering Information

10.3 oz. Cartridge
Black

ITEM #	UNITS/CASE	CASES/PALLET
3211	12	108

Specifications

Federal Specification SS-C-153C Type I
ASTM D6511
SCAQMD Rule #1168

Performance



CONCRETE & BLACKTOP REPAIR Sealants



Titebond® Concrete Repair Sealant is a flexible, acrylic latex formula specifically designed for repairing and sealing cracks in steps, patios, driveways, sidewalks and mortar joints. Its excellent adhesion and flexibility will not peel, chip, crack or pull away from repaired areas. It provides an air-tight, weather-resistant seal that helps prevent water and ice damage.

Ideal For

Sealing cracks in steps, patios, driveways, sidewalks and mortar joints.

Seals

Concrete, stucco, metal, masonry, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Gray

ITEM #	UNITS/CASE	CASES/PALLET
3171	12	108

Specifications

ASTM C834 Type OP Grade -18°C

Performance



Titebond® Blacktop Repair Sealant is a durable, acrylic latex formula specifically designed for repairing and sealing cracks in all asphalt surfaces. It dries quickly with a textured black color that blends well with surrounding surfaces. It will not peel, chip, crack or pull away from repaired areas due to temperature changes, UV light or severe weather changes. It helps prevent damage due to water and ice.

Ideal For

Sealing driveways, playgrounds, parking lots and pavement.

Seals

Asphalt, metal, masonry, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Black

ITEM #	UNITS/CASE	CASES/PALLET
3181	12	108

Specifications

ASTM C834 Type OP Grade -18°C

Performance



KITCHEN & BATH / RADON Sealants



Titebond® Kitchen & Bath Sealant is a high-performance, modified acrylic formula designed to permanently seal high-moisture areas found in kitchens and baths. This flexible sealant offers strong, watertight adhesion and is safe for food preparation areas when fully cured.

Ideal For

Sealing around tubs, showers, sinks and countertops.

Seals

Vinyl, ceramic tile, porcelain, plastic, painted surfaces, aluminum, glass, marble, brick, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
White
Clear

ITEM #	UNITS/CASE	CASES/PALLET
1701	12	108
1711	12	108

Specifications

White: ASTM C834 Type OP Grade 0°C; FDA 21-CFR-177.2600
Clear: ASTM C834 Type C Grade NF; FDA 21-CFR-177.2600

Performance



Titebond® Radon Sealant is a non-chemically curing sealant that combines the superior flexibility and durability of a silicone and allows joint movement capability of at least ± 25% with 100% recovery. Use on foundation cracks, joints and penetrations, around foundation coatings and membranes surrounding the foundation.

Ideal For

Reducing the entry of radon through the foundation.

Seals

Concrete, galvanized steel, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Concrete Gray

ITEM #	UNITS/CASE	CASES/PALLET
3251	12	108

Specifications

ASTM C920 Grade NS Class 25, ASTM C834 Type OP Grade -18°C
Federal Specification TTS-00230C Type S Class A

Performance



ACOUSTICAL SMOKE & SOUND Sealant



Titebond® Acoustical Smoke & Sound Sealant is a professional-quality sealant designed to improve STC (Sound Transmission Class) ratings in wall and floor systems. It tools easily, is paintable, mold and mildew resistant, remains flexible and will not become hard or brittle with age. This plasticizer-free, VOC-compliant, non-flammable formula is environmentally safe.

Ideal For

Sealing air gaps between floor/plate and around partition panels, repairing cracks, eliminating rattles in drywall/plaster and bonding drywall panels together.

Seals

Drywall, concrete, wood, metal, masonry, brick, stone, ceramic tile, marble, aluminum, piping including PVC and CPVC and most common building materials.

Ordering Information

28 oz. Cartridge
White
5 Gallon Pail
White

ITEM #	UNITS/CASE	CASES/PALLET
2892	12	44
2897	1	24

Specifications

ASTM C834 Type OP Grade -18°C
ASTM C920 Type S Grade NS Class 25 M, G and A
CA 01350
LEED v4.1
UL tested and classified
Tested in accordance with ASTM E84
Appropriate for application and use in accordance with ASTM C919 and ASTM E90
Meets NFPA Class A Fire Rating (0 smoke; 0 flame spread)

Performance



100% SILICONE *Sealant*



Titebond® 100% Silicone Sealant is a non-staining versatile formula designed for both interior and exterior applications. This strong, permanently flexible sealant will not shrink or discolor over time and provides excellent weather-resistance. The mildew resistant formula will not crack or become brittle with age and resists fading or yellowing.

Ideal For

General construction, remodeling and repair projects.

Seals

Vinyl, aluminum, glass, marble, granite, painted surfaces and most common building materials.

Ordering Information

10.1 oz. Cartridge
White

4 Colors Available

Specifications

ASTM C920
Federal Specification TT-S-00230C and TT-S-001543A
FDA regulation 21-CFR-177.2600 when fully cured
NSF 51 Certified for direct food contact

Performance



UA 920 *Sealant*



Titebond® UA 920 Sealant is a high-performance, urethane acrylic elastomeric formula which eliminates shiners, reduces dirt pickup, has great UV resistance and up to 800% elongation. This superior handling formula can be used as a sealant or adhesive and offers unbeatable adhesion to most common building materials. It provides an airtight, water-resistant seal, remains permanently flexible and spans gaps up to 2" wide.

Ideal For

Sealing around siding, windows and doors. Interior/exterior use for nearly any project.

Seals

Siding, windows, doors, concrete, metal, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
White

3 Colors Available

Specifications

ASTM C920 Grade NS Class 25
ASTM C834 Type OP Grade -18°C
Federal Specification TT-S-00230C Type S Class A
AAMA 808.3

Performance



PAINTERS PLUS & PAINTERS **Caulks**

Titebond® Painters Plus™ Caulk is an interior and exterior siliconized acrylic caulk that provides a strong, weather-resistant seal for most construction and repair applications. It is easy to extrude, resists cracking and chalking and won't stain or bleed through the paint. This mildew resistant formula contains no plasticizers or phthalates and will not cause shiners.

Ideal For

Sealing joints, repairing cracks and back-filling gaps for interior or exterior applications.

Seals

Wood, metal, glass, masonry, aluminum, brick and most common building materials.

Ordering Information

10.1 oz. Cartridge
White
Clear

ITEM #	UNITS/CASE	CASES/PALLET
8301	12	108
8331	12	108

8 Colors Available

Specifications

ASTM C834 Type OP Grade -18°C

Performance



WATER CLEANUP



PAINTABLE



MILDEW/MOLD RESISTANT



TOOLS EASILY

Titebond® Painters Caulk is an interior use, latex caulk that repairs cracks in plaster/drywall and fills gaps around wood trim, moldings, mantels and baseboards. It is de-aired for a smooth, uniform bead that extrudes and tools easily leaving no residual odor behind. This mildew resistant formula contains no plasticizers or phthalates.

Ideal For

Sealing joints, repairing cracks and filling gaps for interior applications.

Seals

Wood, metal, glass, masonry, aluminum, brick and most common building materials.

Ordering Information

10.1 oz. Cartridge
White

ITEM #	UNITS/CASE	CASES/PALLET
7301	12	108

Specifications

ASTM C834 Type OP Grade -18°C

Performance



WATER CLEANUP



PAINTABLE



MILDEW/MOLD RESISTANT



TOOLS EASILY

PRO-GRADE PLUS & PRO-GRADE **Caulks**



Titebond® Pro-Grade Plus Caulk is a multi-purpose, siliconized acrylic latex caulk for interior and exterior use. This easy-to-use formula dries quickly and cleans up with water. It offers great weather-resistance, has a water resistant seal once cured, tools easily and can be painted in 2 hours. It offers unbeatable adhesion to most common building materials.

Ideal For

Sealing joints, repairing cracks and back-filling gaps for interior and exterior applications.

Seals

Wood, metal, glass, tile, drywall, plaster, concrete, plastic, fiberglass, masonry, aluminum, brick and most common building materials.

Ordering Information

10.1 oz. Cartridge
White

ITEM #	UNITS/CASE	CASES/PALLET
8401	12	108

Specifications

ASTM C834 Type OP Grade -18°C
ASTM C920 Type S Grade NS Class 25

Performance



WATER CLEANUP



PAINTABLE



TOOLS EASILY

Titebond® Pro-Grade Caulk is a multi-purpose, acrylic latex caulk for interior use. Easy to use, dries quickly, cleans up with water and easily painted with a water-based paint and once cured, its seal is water resistant. It offers unbeatable adhesion to most common building materials.

Ideal For

Sealing joints, repairing cracks and filling gaps for interior applications.

Seals

Wood, metal, glass, masonry, aluminum, brick and most common building materials.

Ordering Information

10.1 oz. Cartridge
White

ITEM #	UNITS/CASE	CASES/PALLET
7401	12	108

Specifications

ASTM C834 Type OP Grade -18°C
ASTM C920 Type S Grade NS Class 25

Performance



WATER CLEANUP



PAINTABLE



TOOLS EASILY

X-TREME WINDOW & DOOR & MULTI-PURPOSE **Foams**



Titebond® WeatherMaster™ X-TREME Window & Door low pressure, one-component polyurethane foam sealant is a high yield, closed cell, low pressure build window and door foam sealant. It complies with AAMA 812 and will not bow or distort windows or doors. X-TREME Window & Door is designed to resist moisture and mold problems.

Ideal For

Sealing windows and doors, and preventing moisture and mildew problems.

Ordering Information

12 oz. Can
24 oz. Can

ITEM #	UNITS/CASE	CASES/PALLET
8531	12	75
8532	12	48

Specifications

ASTM C518, ASTM D1621, ASTM D1622, ASTM D2126 AND D2856
ASTM E283 AND GREENGUARD UL AND UL

Titebond® WeatherMaster™ X-TREME Multi-Purpose foam is a triple expansion, low pressure, one-component polyurethane foam sealant. It is moisture-cured and designed to seal and fill small cracks and voids. This product creates a tight barrier against noise, moisture and infiltration – even in X-TREME temperatures.

Ideal For

Sealing insulation board joints, electrical outlets, base plates, can lights and exterior gaps.

Ordering Information

12 oz. Can
24 oz. Can

ITEM #	UNITS/CASE	CASES/PALLET
8521	12	75
8522	12	48

Specifications

ASTM 1623, ASTM C518, ASTM D1621, ASTM D1622, ASTM D2126 AND ASTM D6226
GREENGUARD UL AND UL

X-TREME ACCESSORIES



Titebond® WeatherMaster™ X-TREME dispensing unit for frequent use by the professional contractor. Adjustable bead control with X-TREME foam sealants.

Ordering Information

Dispenser Gun / 7" Barrel (18 cm)
Multi-Purpose Cleaner

ITEM #	UNITS/CASE	CASES/PALLET
17862	2	120
8551	12	75

X-TREME FIREBLOCK Foam



Titebond® WeatherMaster™ X-TREME Fireblock low pressure one-component polyurethane foam sealant is a moisture cured foam designed to seal, fill, bond and stop air infiltration in areas where a fireblock product is required. It has a recognizable orange color allowing inspectors to easily identify the use of an approved fireblock product for Type V residential construction. Due to its expansion characteristics, it is more effective than many traditional fireblocking materials for the blocking of flames and smoke in concealed penetrations, preventing flame spread from room to room and floor to floor.

Ideal For

Sealing, filling, bonding and stopping air infiltration where a fireblock product is required.

Ordering Information

12 oz. Can / Orange
24 oz. Can / Orange

ITEM #	UNITS/CASE	CASES/PALLET
8541	12	75
8542	12	48

Specifications

ASTM 1623, ASTM C518, ASTM D1621, ASTM D1622 AND ASTM D2126
ASTM E814, ASTM E2178, GREENGUARD UL AND UL

SUPERFOAM



Titebond® WeatherMaster™ SuperFoam™ 100, 200 and 600 are low pressure, medium density, two-component spray polyurethane foams. These products are designed to fill and seal various size voids (100, 200 and 600), deaden sound or reduce vibration. SuperFoam's excellent adhesion properties create a continuous air barrier. This quality completes the building envelope, resulting in improved indoor air quality and lower heating and cooling costs. In addition, these products are UL GREENGUARD™ Gold Certified. SuperFoam is a Class 1(A) fire rated foam that meets various building code requirements.

Ideal For

Insulating and improving air quality to complete the building envelope.

Ordering Information

100 SuperFoam
200 SuperFoam
600 SuperFoam Part A
600 SuperFoam Part B

ITEM #	UNITS/CASE	CASES/PALLET
84100	1	26
84200	1	26
84600A	1	18
84600B	1	18

Specifications

ASTM C518, ASTM D1621, ASTM D1622, ASTM D2126 AND ASTM D2856
ASTM E283, ASTM E2183, UL GREENGUARD GOLD AND UL

Titebond offers a variety of merchandising materials to assist in the marketing, display and promotion of our caulks and sealants. These merchandisers are available to all customers and a Titebond representative can order and assist in set-up. All items can be combined to best fit the needs of individual stores and situations.

To order, please contact your Titebond representative.

All merchandisers are ordered on a first come, first serve basis while supplies last. Products sold separately unless otherwise noted. Additional lead time should be expected if items are on back order.

SUPPORT

Merchandising



Vinyl Banner 60" w x 24" h
Display in-store to showcase the Titebond family of sealants



Demo Bricks
Ideal for training or P.O.P. placement
Available for these products:
WeatherMaster, Metal Roof, Ultimate MP and DuraMaster



- Color Boards**
- WeatherMaster Color Board**
Showcases ACTUAL product/color
Convenient size fits on top of dolly rack
 - Metal Roof Color Board**
Showcases ACTUAL product/color
Convenient size fits on top of dolly rack
 - Ultimate MP Color Board**
Showcases ACTUAL product/color
 - DuraMaster Color Card**
Showcases ACTUAL product/color



Counter Mats 18" w x 12" h
Display the Titebond sealant family on counter space



Chain Signs 5" w x 7" h
Ideal for P.O.P. placement
Available for these products:
Ultimate MP, Metal Roof, Gutter & Seam, Radon and Concrete Joint



Vertical Pusher Rack 12" w x 7" h x 14" d
Five row Pusher Rack holds 30 cartridges

ITEM #	DESCRIPTION	CASE PACK
17955	10 oz. Short Nozzle Bin Basket	2
17977	10 oz. Long Nozzle Bin Basket	2
17956	28 oz. Cartridge Bin Basket	1
17954	10 oz. Double Long Nozzle Bin Basket	1
17986	10 oz. Vertical Pusher Rack	2



Shelf Cards
28 oz. Shelf Cards 17.75" w x 3" h
Can be inserted into 28 oz. Cartridge Bin Baskets
10 oz. Shelf Cards 12" w x 3" h
Can be inserted into 10 oz. Vertical Pusher Racks and 10 oz. Cartridge Bin Baskets



Horizontal Cartridge Bin Baskets
Perfect for "on-shelf" merchandising, shelf cards slide easily into front channel
Durable metal construction holds 24 cartridges
10 oz. Long Nozzle Cartridge Bin Basket 12" w x 8" h x 15.25" d
Fits long nozzle, reactive sealants
28 oz. Cartridge Bin Basket 18" w x 8" h x 15.25" d
One size fits all 28 oz cartridges





WeatherMaster 3 Case Stacker
Durable, stand alone display for easy placement
Holds 3, 9.5 oz. cases
Order #17854



Cartridge Rolling Dolly Display 27" w x 62" h x 14" d
Durable, versatile display for any cartridge item
8 baskets per dolly - Holds 24 cartridges per basket
Shelf cards slide easily into front channel

ITEM #	DESCRIPTION	CASE PACK
17961	Titebond Header Display	1
17980	Cartridge Rolling Dolly Display with Titebond Header	1



Customizable Sealant Headers 48" w x 12" h
Featuring customizable sealant products with dealer logo

SUPPORT Merchandising



Pallet Corners
Full Pallet - Holds 108, 10.1 oz. cases
Mini Pallet - Holds 27, 10.1 oz. cases
Available for these products:
WeatherMaster, Metal Roof, Ultimate MP, DuraMaster and Pro-Grade Plus



Sales Presentation Kits
Ideal for training and potential customers
Kits include 2 tubes of product, demo brick, sales sheets and other corresponding product literature.
Available for these products:
WeatherMaster, Metal Roof, Ultimate MP and DuraMaster



DuraMaster Corrugated Floor Display
Durable, standalone for easy placement
Holds 6, 10.1 oz. cases

ITEM #	DESCRIPTION	CASE PACK
17989	Flat Stock - DuraMaster Display	1
32001FD	Full Product - DuraMaster Display with 6 cases of 10.1 oz. White	1

TECHNOLOGY

Specifications

Titebond caulks and sealants must pass stringent testing set forth by standardized testing methods. These specifications ensure that a product is suitable for a specific application and that it will perform as expected. Below is a reference guide to assist in your product selection.

Visit titebond.com for the most up-to-date information.

	AAMA 803.3	AAMA 808.3	ASTM C834	ASTM C919	ASTM C920	ASTM D6511	ASTM E84	ASTM E90	FDA 21-CFR-177.2600	LEED v4.1	MIAMI-DADE COUNTY APPROVED	NFPA CLASS A FIRE RATING	NSF 51 CERTIFIED	SCAQMD RULE #1168	FEDERAL SPECIFICATIONS			UL TESTED & CLASSIFIED	USDA COMPLIANT	CA 01350	CAN/CGSB-19.13-M87	PAINTABLE	STANDARD COLORS	VOC CONTENT	CLEANUP	
															SS-C-153C	TT-S-001543A	TT-S-00230C									
WEATHERMASTER		●			●					●							●		●		●	1 HOUR	200+	<2%	ACETONE OR ISOPROPYL ALCOHOL	
METAL ROOF		●			●						●						●		●		●	1 HOUR	100+	<2%	ACETONE OR ISOPROPYL ALCOHOL	
ULTIMATE MP		●			●						●						●		●		●	1 HOUR	15+	<2%	ACETONE OR ISOPROPYL ALCOHOL	
DURAMASTER	●	●	●		●					●							●					2-4 HOURS	13	<1.5%	WATER	
CONCRETE JOINT					●												●				●	1 HOUR	2	<2%	ACETONE OR ISOPROPYL ALCOHOL	
GUTTER & SEAM					●												●		●		●	1 HOUR	2	<2%	ACETONE OR ISOPROPYL ALCOHOL	
CONCRETE REPAIR			●																			2-4 HOURS	1	<1.5%	WATER	
BLACKTOP REPAIR			●																			2-4 HOURS	1	<1.5%	WATER	
ROOF PLUS					●												●					2 HOURS	1	32%	XYLENE	
ROOF CEMENT						●								●	●							2 HOURS	1	27%	XYLENE	
KITCHEN & BATH			●						●													4-6 HOURS	2	<1.5%	WATER	
RADON			●		●												●					2-4 HOURS	1	<1.5%	WATER	
ACOUSTICAL			●	●	●		●	●		●		●						●		●		2-4 HOURS	1	<2.5%	WATER	
100% SILICONE					●				●				●			●	●					NO	4	3%	MINERAL SPIRITS	
UA 920			●		●												●					2-4 HOURS	3	<1.5%	WATER	
PAINTERS		●	●																			2-4 HOURS	1	<1.5%	WATER	
PAINTERS PLUS			●																			2-4 HOURS	8	<1.5%	WATER	
PRO-GRADE			●		●																	2-4 HOURS	1	<1.5%	WATER	
PRO-GRADE PLUS			●		●																	2-4 HOURS	1	<1.5%	WATER	

PRODUCTS

SKU Information

		PRODUCT NUMBER	PRODUCT UPC	CASE UPC	CASE QUANTITY	PRODUCT WEIGHT (LBS.)	CASE LENGTH (INCHES)	CASE WIDTH (INCHES)	CASE HEIGHT (INCHES)	SHELF LIFE (MONTHS)	PALLET QUANTITY	PALLET WEIGHT (LBS.)
HIGH PERFORMANCE	WEATHERMASTER 9.5 OZ. – WHITE	44001	0 37083 44001 0	100 37083 44001 7	12	12.41	6.25	8.13	12.25	24	108	1340.28
	WEATHERMASTER METAL ROOF 9.5 OZ. – WHITE	61001	0 37083 61001 7	100 37083 61001 4	12	12.41	6.25	8.13	12.25	24	108	1340.28
	WEATHERMASTER METAL ROOF 20 OZ. SAUSAGE – WHITE	63002	0 37083 63002 2	100 37083 63002 9	20	38.51	8.00	14.00	10.50	48	42	1617.42
	WEATHERMASTER ULTIMATE MP 9.5 OZ. – WHITE	71001	0 37083 71001 4	100 37083 71001 1	12	12.41	6.25	8.13	12.25	24	108	1340.28
	WEATHERMASTER ULTIMATE MP 20 OZ. SAUSAGE – WHITE	71002	0 37083 71002 1	100 37083 71002 8	20	38.51	8.00	14.00	10.50	48	42	1617.42
	DURAMASTER 10.1 OZ. – WHITE	32001	0 37083 32001 5	100 37083 32001 2	12	12.01	6.25	8.13	12.25	24	108	1297.08
	WEATHERMASTER CONCRETE JOINT 10.1 OZ. – GRAY	3191	0 37083 03191 1	100 37083 03191 8	12	15.07	6.25	8.13	11.63	18	108	1627.56
	WEATHERMASTER CONCRETE JOINT 28 OZ. – GRAY	3192	0 37083 03192 8	100 37083 03192 5	12	38.18	9.00	11	17.00	18	44	1679.92
	WEATHERMASTER GUTTER & SEAM 9.5 OZ. – WHITE	7321	0 37083 07321 8	100 37083 07321 5	12	13.09	6.25	8.13	12.25	24	108	1413.72
EXTERIOR	CONCRETE REPAIR 10.1 OZ.	3171	0 37083 03171 3	100 37083 03171 0	12	15.00	6.25	8.13	11.63	24	108	1620
	BLACKTOP REPAIR 10.1 OZ.	3181	0 37083 03181 2	100 37083 03181 9	12	15.42	6.25	8.13	11.63	24	108	1665.36
	ROOF PLUS 10.1 OZ.	3241	0 37083 03241 3	100 37083 03241 0	12	9.64	6.25	8.13	11.63	24	108	1041.12
	ROOF CEMENT 10.3 OZ.	3211	0 37083 03211 6	100 37083 03211 3	12	10.18	6.25	8.13	11.63	12	108	1099.44
INTERIOR	KITCHEN & BATH 10.1 OZ. – WHITE	1701	0 37083 01701 4	100 37083 01701 1	12	12.37	6.25	8.13	11.63	24	108	1335.96
	RADON 10.1 OZ.	3251	0 37083 03251 2	100 37083 03251 9	12	15.00	6.25	8.13	11.63	24	108	1620
	ACOUSTICAL 28 OZ.	2892	0 37083 02892 8	100 37083 02892 5	12	37.21	10.75	8.13	16.75	24	44	1637.24
MULTI-PURPOSE	100% SILICONE 10.1 OZ. – WHITE	2601	0 37083 02601 6	100 37083 02601 3	12	9.99	6.25	8.13	11.63	24	108	1078.92
	UA 920 10.1 OZ. – WHITE	8701	0 37083 08701 7	100 37083 08701 4	12	11.00	6.25	8.13	11.63	24	108	1188
	PAINTERS CAULK 10.1 OZ.	7301	0 37083 07301 0	100 37083 07301 7	12	14.82	6.25	8.13	11.63	24	108	1600.56
	PAINTERS PLUS CAULK 10.1 OZ. – WHITE	8301	0 37083 08301 9	100 37083 08301 6	12	14.82	6.25	8.13	11.63	24	108	1600.56
	PRO-GRADE CAULK 10.1 OZ.	7401	0 37083 07401 7	100 37083 07401 4	12	13.87	6.25	8.13	11.63	24	108	1497.96
	PRO-GRADE PLUS CAULK 10.1 OZ.	8401	0 37083 08401 6	100 37083 08401 3	12	13.87	6.25	8.13	11.63	24	108	1497.96
FOAM	X-TREME MULTI-PURPOSE STRAW FOAM AEROSOL 12 OZ.	8521	0 37083 08521 1	100 37083 08521 8	12	14	12.00	9.30	8.50	18	75	1050
	X-TREME MULTI-PURPOSE GUN FOAM AEROSOL 24 OZ.	8522	0 37083 08522 8	100 37083 08522 5	12	24	11.69	9.38	11.63	18	48	1152
	X-TREME WINDOW & DOOR STRAW FOAM AEROSOL 12 OZ.	8531	0 37083 08531 0	100 37083 08531 7	12	14	12.00	9.30	8.50	18	75	1050
	X-TREME WINDOW & DOOR GUN FOAM AEROSOL 24 OZ.	8532	0 37083 08532 7	100 37083 08532 4	12	24	11.69	9.38	11.63	18	48	1152
	X-TREME FIREBLOCK STRAW FOAM AEROSOL 12 OZ.	8541	0 37083 08541 9	100 37083 08541 6	12	14	12.00	9.30	8.50	18	75	1050
	X-TREME FIREBLOCK GUN FOAM AEROSOL 24 OZ.	8542	0 37083 08542 6	100 37083 08542 3	12	24	11.69	9.38	11.63	18	48	1152
	X-TREME MULTI-PURPOSE CLEANER AEROSOL 12 OZ.	8551	0 37083 08551 8	100 37083 08551 5	12	14	12.00	9.30	8.50	18	75	1050
	X-TREME FOAM DISPENSER GUN	17862	0 37083 17862 3	100 37083 17862 0	2	2.8	14.30	15.00	2.19	–	120	336
	WEATHERMASTER SUPERFOAM 100 2-PART SPRAY POLYURETHANE FOAM KIT	84100	0 37083 84100 8	–	1	26.4	10.00	16.00	15.50	12	26	686.4
	WEATHERMASTER SUPERFOAM 200 2-PART SPRAY POLYURETHANE FOAM KIT	84200	0 37083 84200 5	–	1	41	10.00	16.00	15.50	12	26	1066
	WEATHERMASTER SUPERFOAM 600 SPRAY POLYURETHANE FOAM - PART A (must order with Part B)	84600A	0 37083 84600 3	–	1	59.7	12.50	18.00	19.00	12	18	1074.6
	WEATHERMASTER SUPERFOAM 600 SPRAY POLYURETHANE FOAM - PART B (must order with Part A)	84600B	0 37083 84600 3	–	1	56	12.50	18.00	19.00	12	18	1008